

KU-133A DC&EC series

(Φ133 x 73 mm)
Φ5.24 x 2.87 inch

操作溫度 Operating Temperature: -10℃ ~ +70℃
存儲溫度 Storage Temperature: -40℃ ~ +85℃



軸承系統 全密封長壽命雙滾珠軸承
Bearing System: Fully sealed long life double ball bearings

葉輪 鋁合金板材衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
Impeller: Aluminum plate stamping tensile forming with laser welding process,surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum

引綫長度 Lead Wires: 450mm

功能追加 Designed with optional features RD,
Options: Tach/FG, PWM, 0-10V function

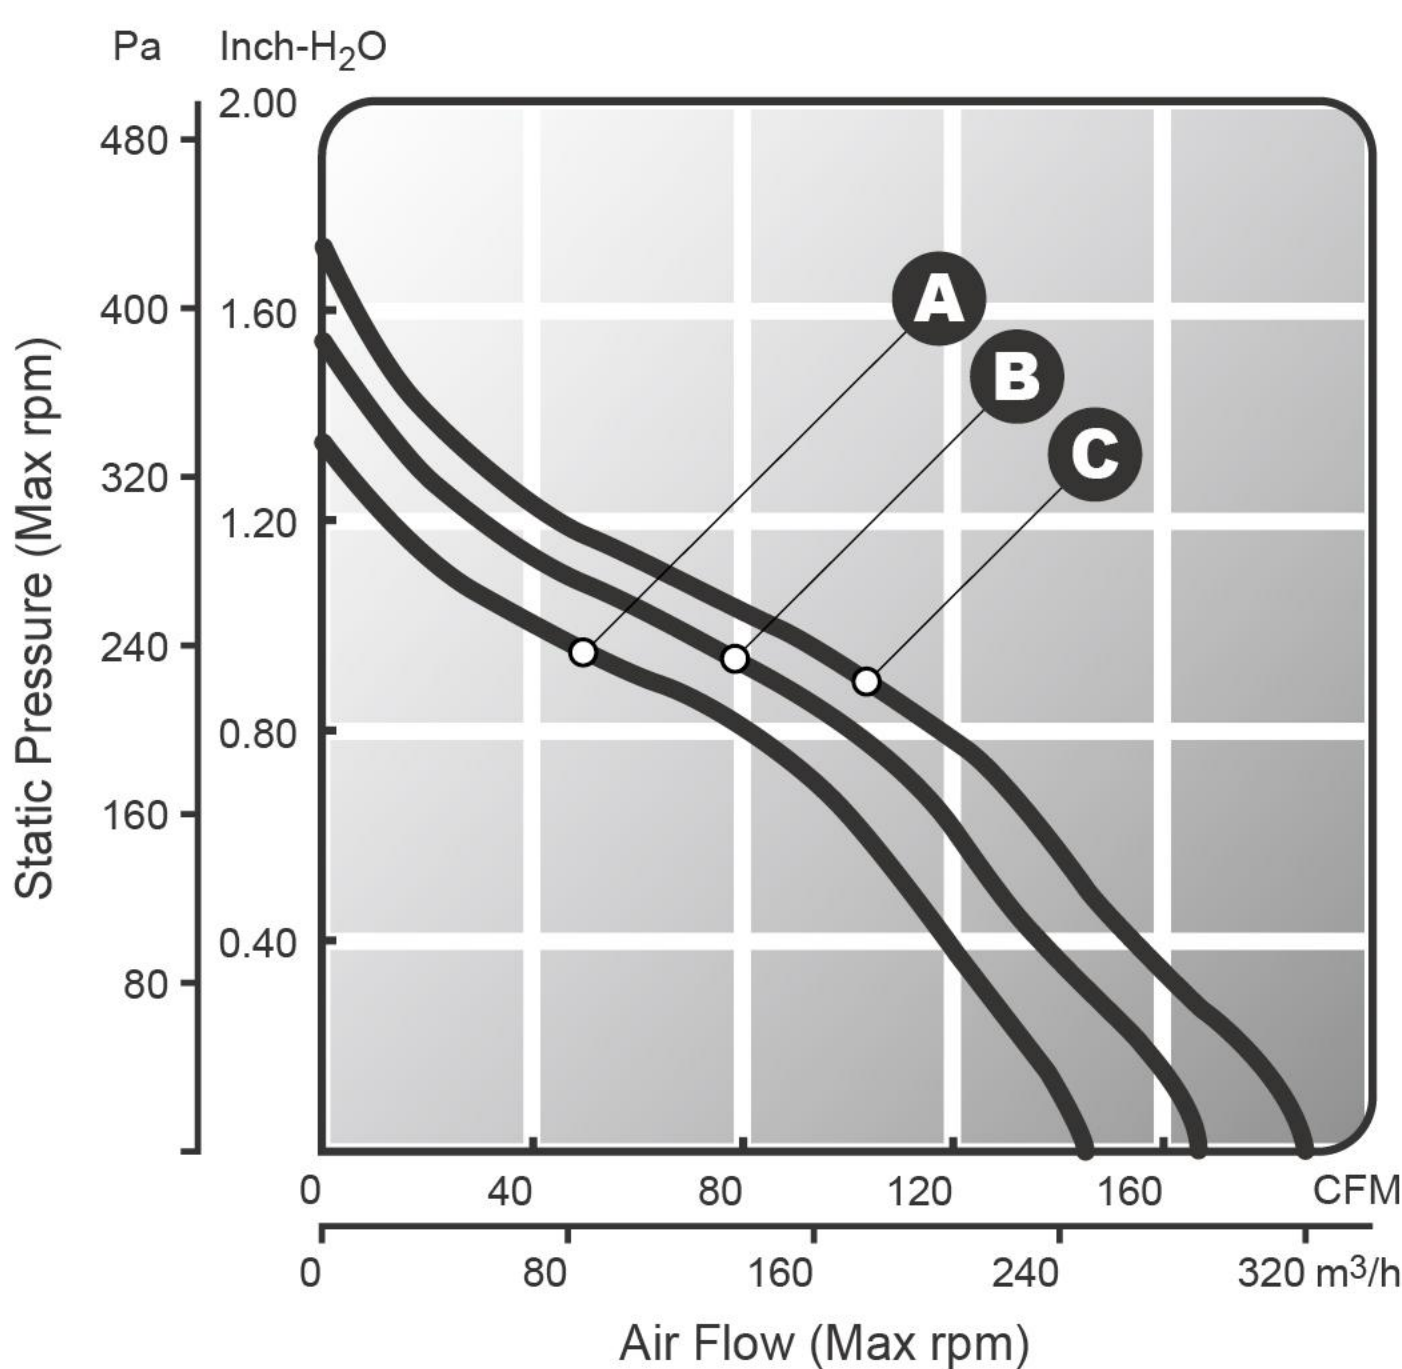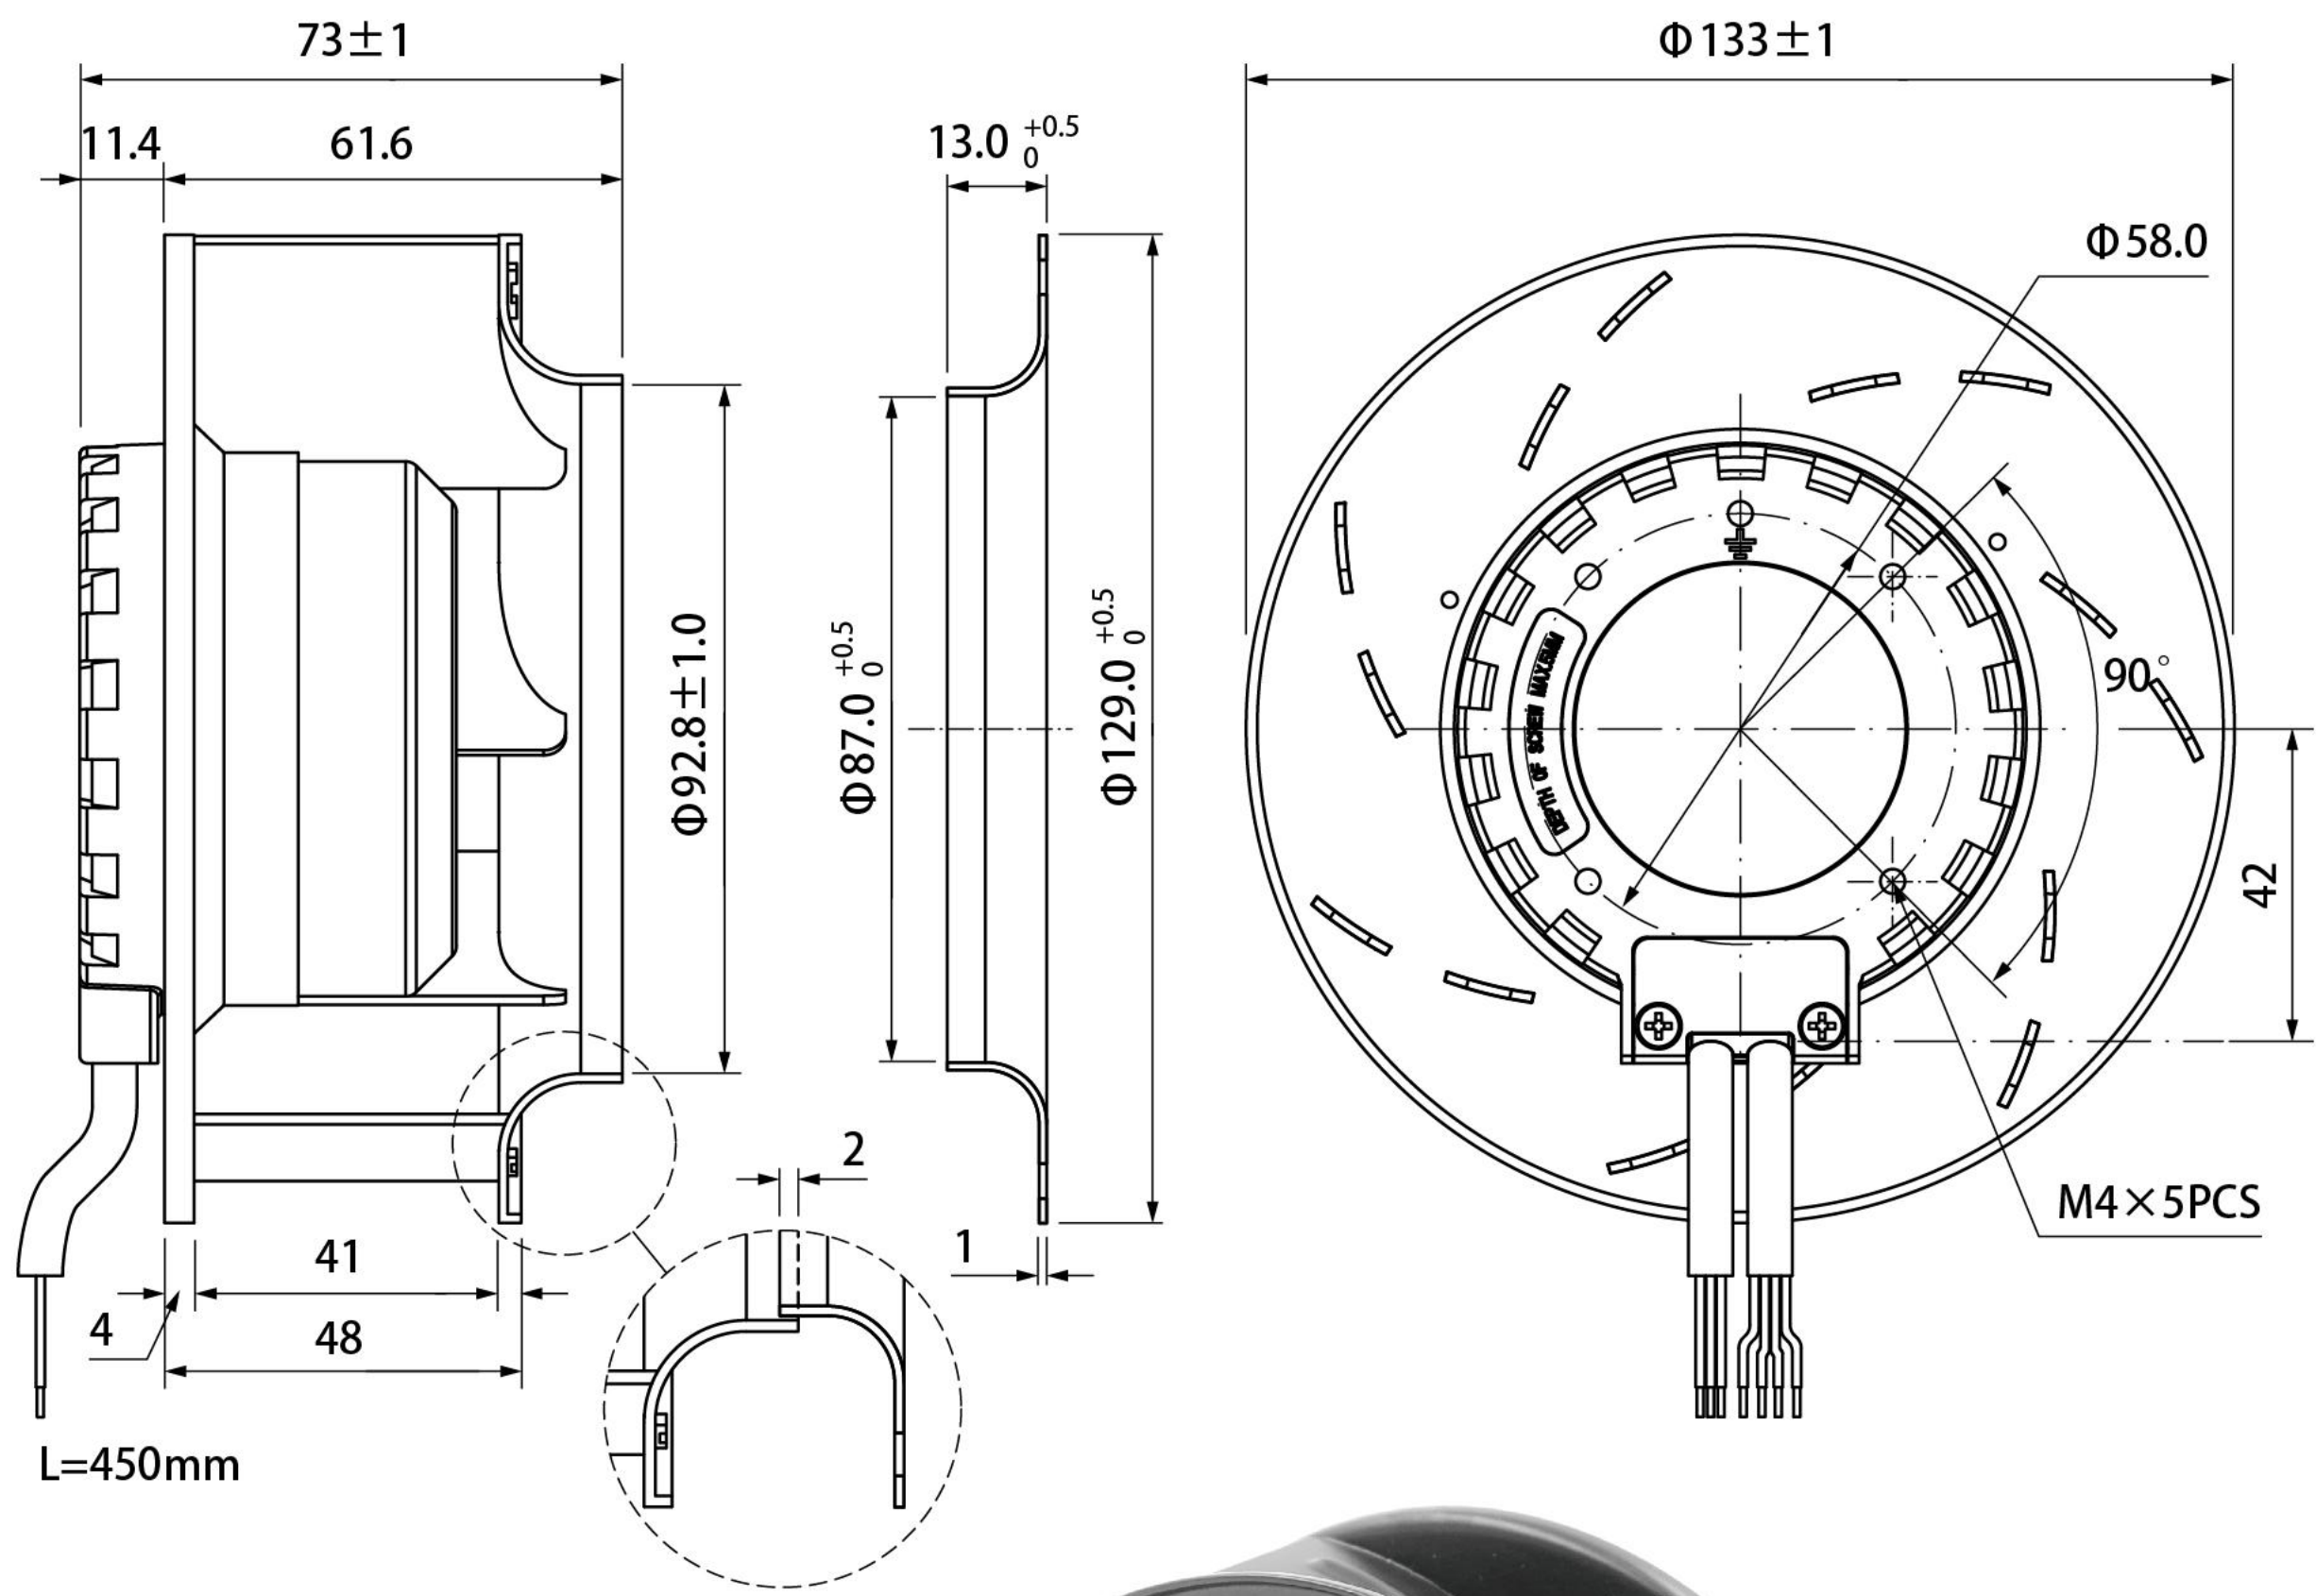

參數表 Specification

	Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(mA)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dbA)	Weight 重量(g)
A	KU133A2800D12B	12VDC	-	1250	15	2800	145	1.33	59	520
B	KU133A3200D12B	12VDC	-	1833	22	3200	166	1.52	63	520
C	KU133A3600D12B	12VDC	-	2500	30	3600	187	1.71	67	520
A	KU133A2800D24B	24VDC	-	625	15	2800	145	1.33	59	520
B	KU133A3200D24B	24VDC	-	917	22	3200	166	1.52	63	520
C	KU133A3600D24B	24VDC	-	1250	30	3600	187	1.71	67	520
A	KU133A2800D48B	48VDC	-	313	15	2800	145	1.33	59	520
B	KU133A3200D48B	48VDC	-	458	22	3200	166	1.52	63	520
C	KU133A3600D48B	48VDC	-	625	30	3600	187	1.71	67	520
A	KU133A2800D110B	110VDC	-	136	15	2800	145	1.33	59	600
B	KU133A3200D110B	110VDC	-	200	22	3200	166	1.52	63	600
C	KU133A3600D110B	110VDC	-	273	30	3600	187	1.71	67	600
A	KU133A2800E0B	100~240VAC	50~60	200~130	14~16	2800	145	1.33	59	600
B	KU133A3200E0B	100~240VAC	50~60	330~190	22~24	3200	166	1.52	63	600

KU-133B DC&EC series

(Φ133 x 91 mm)
Φ5.24 x 3.58 inch

操作溫度 Operating Temperature: -10℃ ~ +70℃
存儲溫度 Storage Temperature: -40℃ ~ +85℃



軸承系統 全密封長壽命雙滾珠軸承
Bearing System: Fully sealed long life double ball bearings

葉輪 鋁合金板材衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
Impeller: Aluminum plate stamping tensile forming with laser welding process,surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum

引綫長度 Lead Wires: 450mm

功能追加 Designed with optional features RD,
Options: Tach/FG, PWM, 0-10V function

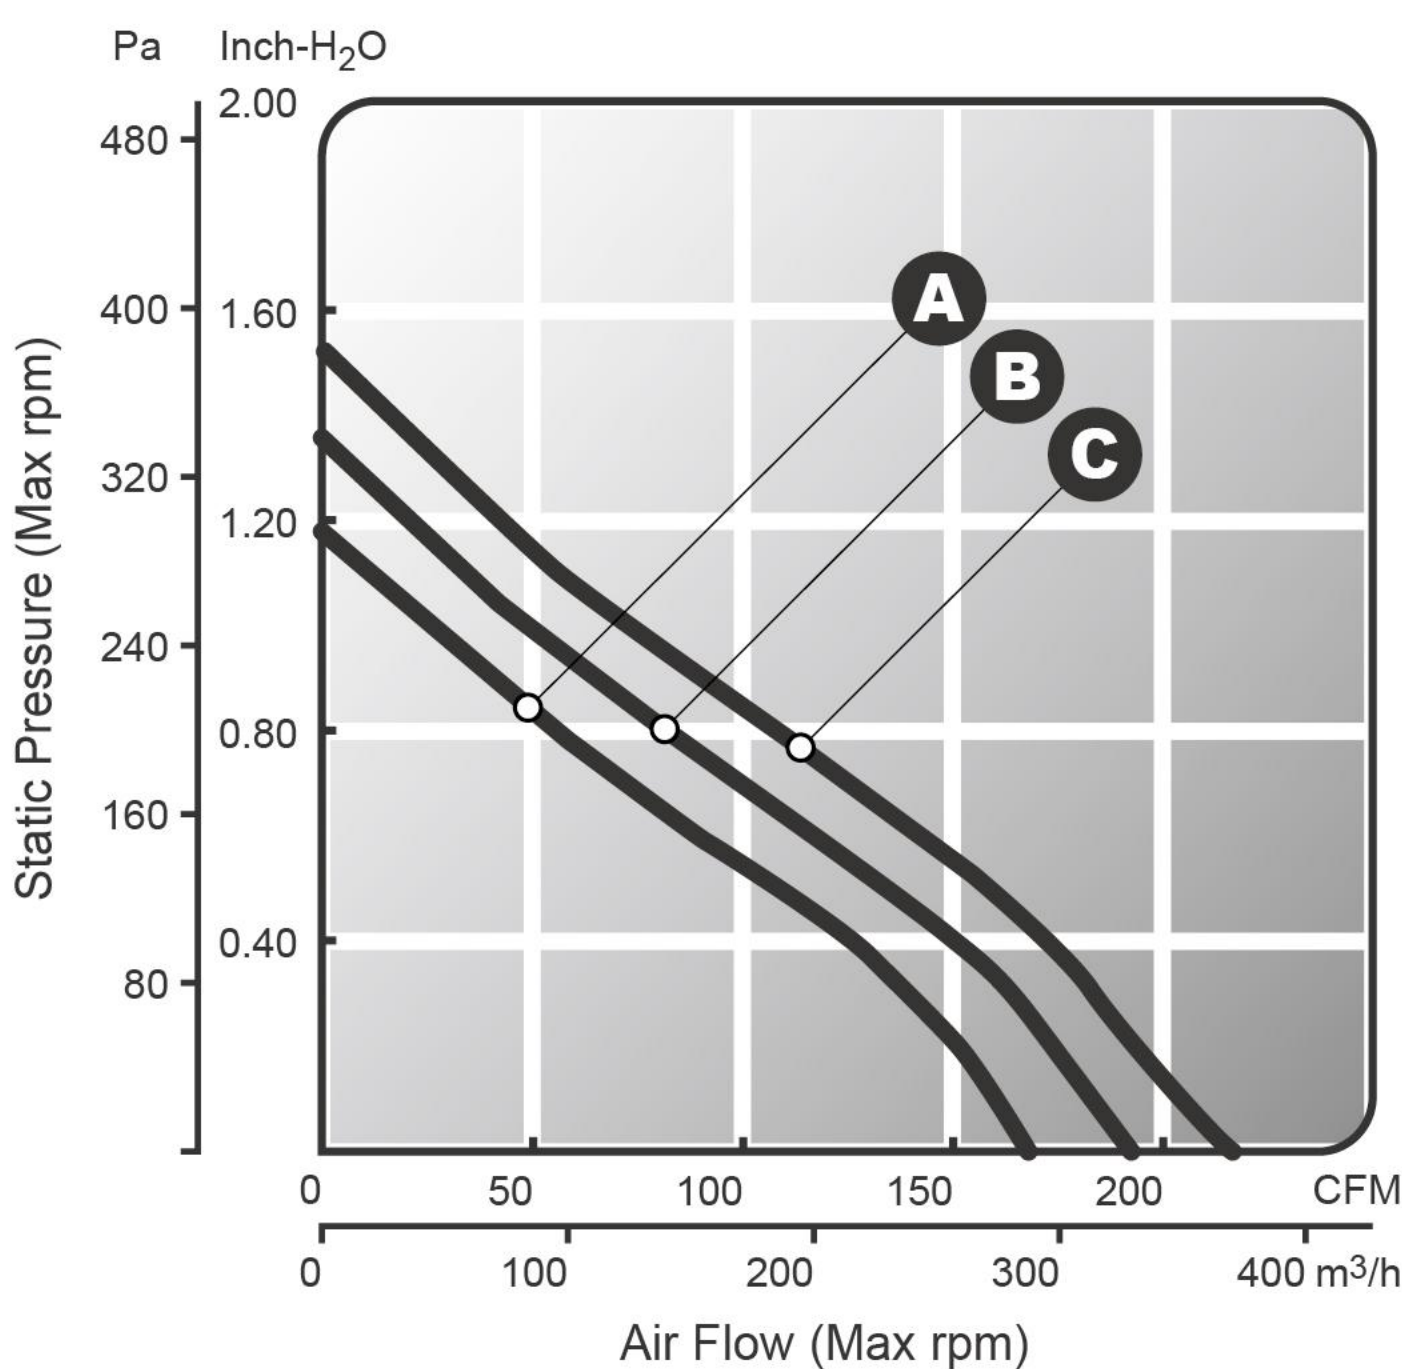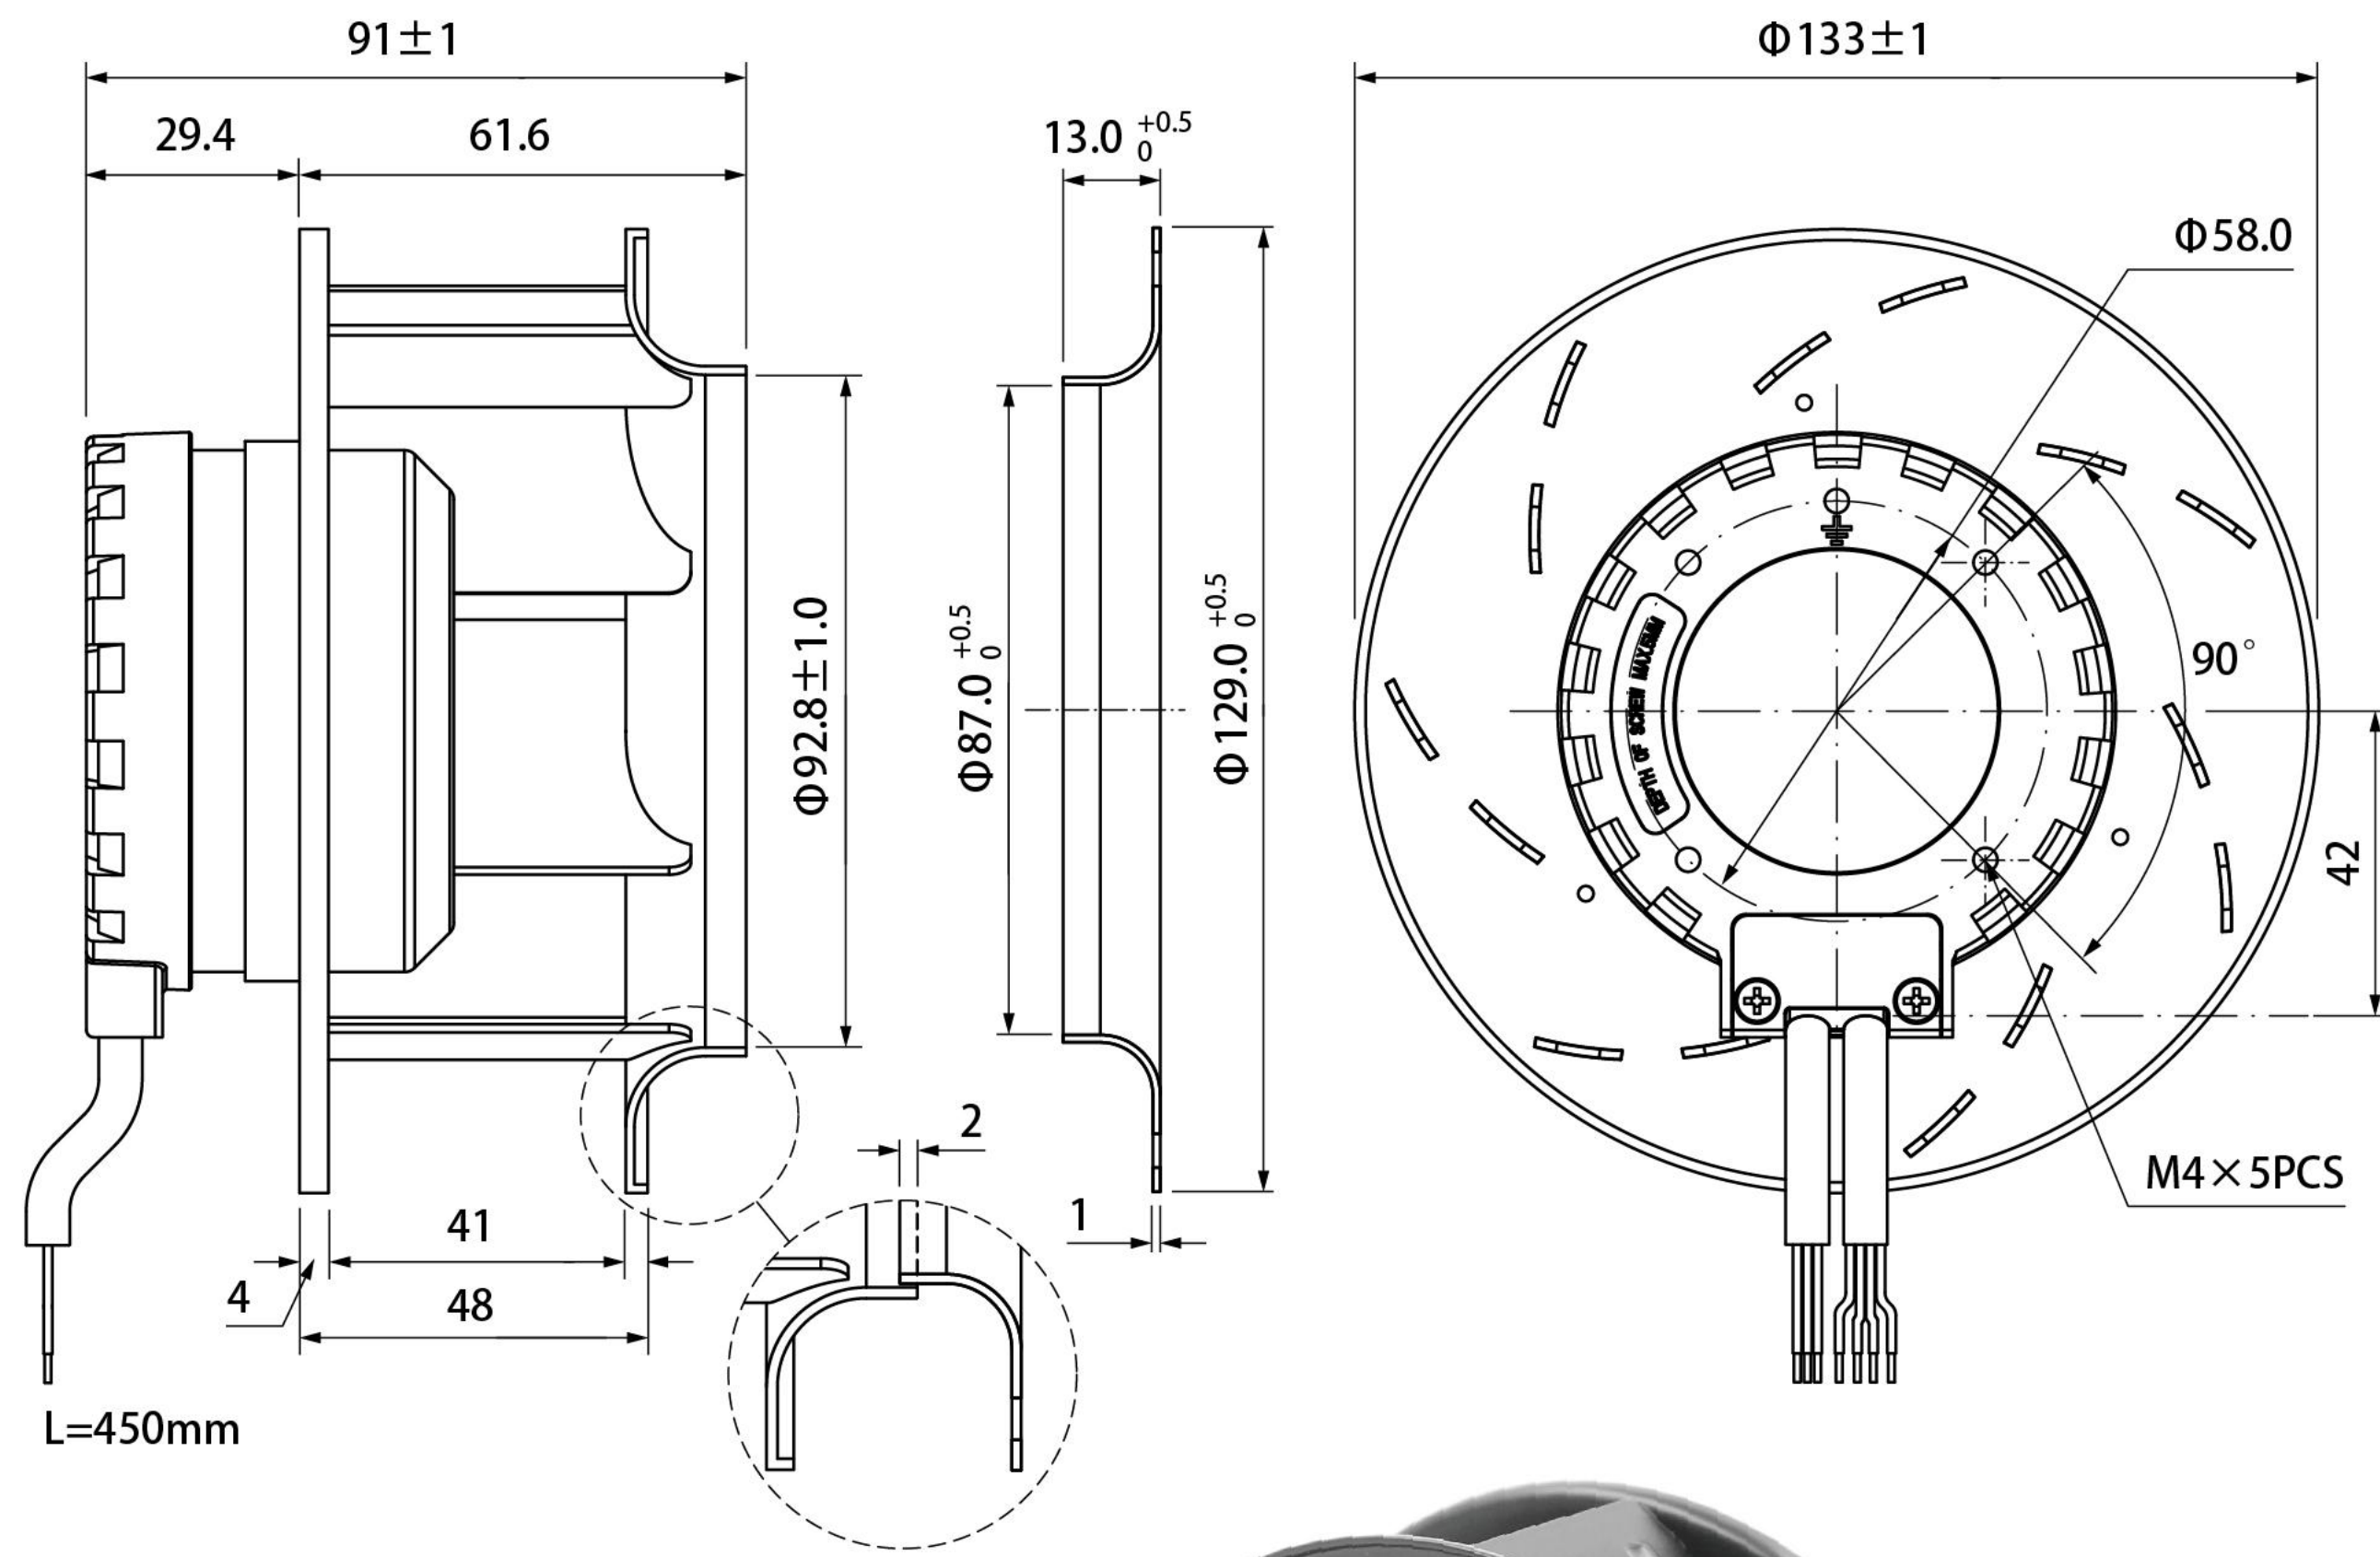

參數表 Specification

	Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(mA)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dbA)	Weight 重量(g)
A	KU133B2800D12B	12VDC	-	1000	12	2800	168	1.18	58	520
B	KU133B3200D12B	12VDC	-	1500	18	3200	192	1.35	62	520
C	KU133B3600D12B	12VDC	-	2000	24	3600	216	1.52	66	520
A	KU133B2800D24B	24VDC	-	500	12	2800	168	1.18	58	520
B	KU133B3200D24B	24VDC	-	750	18	3200	192	1.35	62	520
C	KU133B3600D24B	24VDC	-	1000	24	3600	216	1.52	66	520
A	KU133B2800D48B	48VDC	-	250	12	2800	168	1.18	58	520
B	KU133B3200D48B	48VDC	-	375	18	3200	192	1.35	62	520
C	KU133B3600D48B	48VDC	-	500	24	3600	216	1.52	66	520
A	KU133B2800D110B	110VDC	-	109	12	2800	168	1.18	58	600
B	KU133B3200D110B	110VDC	-	164	18	3200	192	1.35	62	600
C	KU133B3600D110B	110VDC	-	218	24	3600	216	1.52	66	600
A	KU133B2800E0B	100~240VAC	50~60	210~110	11~12	2800	168	1.18	58	600
B	KU133B3200E0B	100~240VAC	50~60	310~180	20~22	3200	192	1.35	62	600
C	KU133B3600E0B	100~240VAC	50~60	340~220	24~26	3600	216	1.52	66	600